


# Argon Minibeam Plasma Source



## Product Description

- Argon spot plasma for fast, uniform and damage-free surface treatment
- Compact and lightweight for easy integration
- Oxidizing and reducing chemistries
- Water-cooled for low temperature: 60 – 120 °C
- No sparks, streamers, ESD, UV or particles

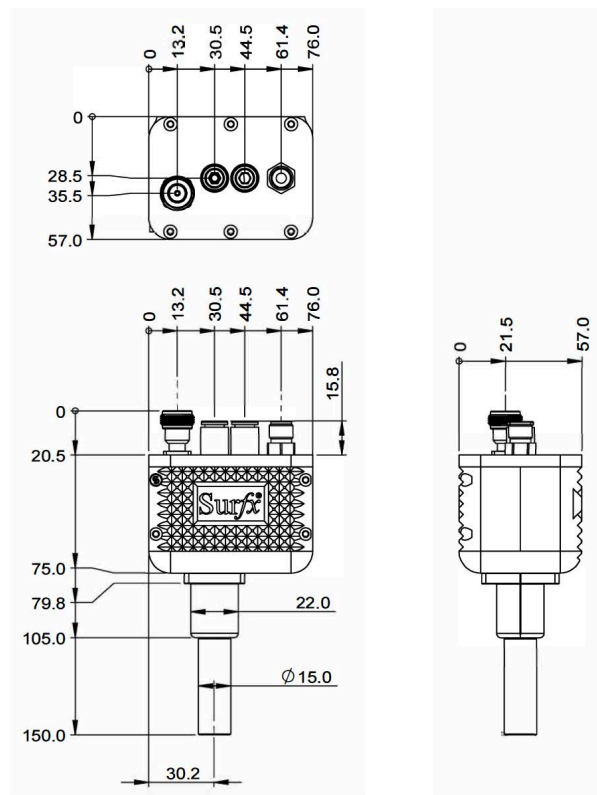

## Technical Specifications

Item	Specifications
Dimensions (W x D x H)	76.0 x 57.0 x 150.0 mm <sup>3</sup> (2.99 x 2.24 x 5.91 in <sup>3</sup> )
Weight	0.45 kg (1.0 lbs)
RF cable length	2.44 m (8.0 ft)
Maximum RF power	160 W
Optimum working distance	2 - 4 mm
Primary gas flow rate	8 - 20 L/min of argon
Process gases	O <sub>2</sub> , N <sub>2</sub> or H <sub>2</sub>

お問い合わせ先  
 株式会社日放電子  
 〒215-0034 神奈川県川崎市麻生区南黒川8-1  
 TEL : 044-989-9129 FAX : 044-989-9167  
 担当部署 : 第二営業部  
[www.nippoe.co.jp](http://www.nippoe.co.jp)

株式会社日放電子